# **GROUND PROTECTION SPILL TRAYS TYPE BSW 21-24**



#### 8 x BSW + 6 x AR + 1 x AE + 3 x KV + 10 x WV (accessories: Drum Trolley type FP-V, Drum Shelves type FR)

### Ground protection spill trays for storage and filling; can be driven on

- max. surface load 5000 kg/m<sup>2</sup>
- max. wheel load 500 kg
- pallet and forklift truck accessible

Modular design, choose from:

- Ground Protection Spill Trays BSW 21-24 construction height 78 mm, with galvanized grid
- Access Ramps AR
- Access Corner Piece AE

filling; can be driven on

Cross-shaped Connector KV, galvanized

Ground protection spill trays for storage and

similar to BSW 21-24 but a different height. Construction height: 123 mm

Accessories for BSW 21-24 and BSW 121-126

metal skirting to connect to the wall, galvanized


Tray Connecting Strip WV, galvanized

	Ground Protection Spill Trays				Access Ramps			Access Corner Pieces	Cross-shaped Tray Connecting Strips Connectors		rips	
	BSW 21	BSW 22	BSW 23	BSW 24	AR 21	AR 22	AR 23	AE 24	KV 24	WV 21	WV 22	WV 23
Dimensions (lxwxh) in mm	1350x1350x78	1900x1350x78	2850x1350x78	2850x1900x78	1350x500x78	1900x500x78	2850x500x78	500x500x78	Ø 120 height 16	1330x55x30	1880x55x30	2850x55x30
Retention capacity in I	135	179	269	378	-	-	-	-	-	-	-	-
Weight in kg	115	160	238	347	31	42	63	6	0,5	2	3	4

## **GROUND PROTECTION SPILL TRAYS TYPE BSW 121-126**



8 x BSW + 6 x AR + 1 x AE + 3 x KV + 10 x WV (Accessories: Drum Trolley FP-V, Drum Shelves FR)

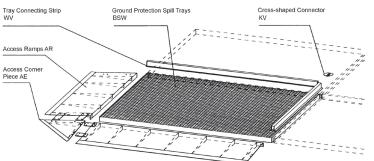

	Ground Protection Spill Trays							Access Ramps			
	BSW 121	BSW 122	BSW 123	BSW 124	BSW 125	BSW 126	AR 121	AR 122	AR 123	AR 124	AE 124
ensions (lxwxh) in mm	500x500x123	1000x500x123	1000x1000x123	2000x1000x123	2500x500x123	2500x1000x123	500x1120x123	1000x1120x123	2000x1120x123	2500x1120x123	1120x1120x123
ntion capacity in l	28	55	113	226	140	263	-	-	-	-	-
<b>jht</b> in kg	25	46	80	155	111	187	26	50	105	131	23

#### Valid for all products on this page:

for more accessories (see page 116)



**Tray Connecting Strip** 

WV 121 WV 122 WV 123 WV 124

2000

2500

1000

Cross-shaped Connector

KV 24

Ø 120 H 16

flammable liquids, GHS categories 1 - 3 hazardous to aquatic environment, GHS categories 1 - 4

500

Length in mm

Fin	ish:

Dimer Reten Weia

galvanized

**On request:** 

stainless steel