


TILTING CONTAINER TYPE BKM

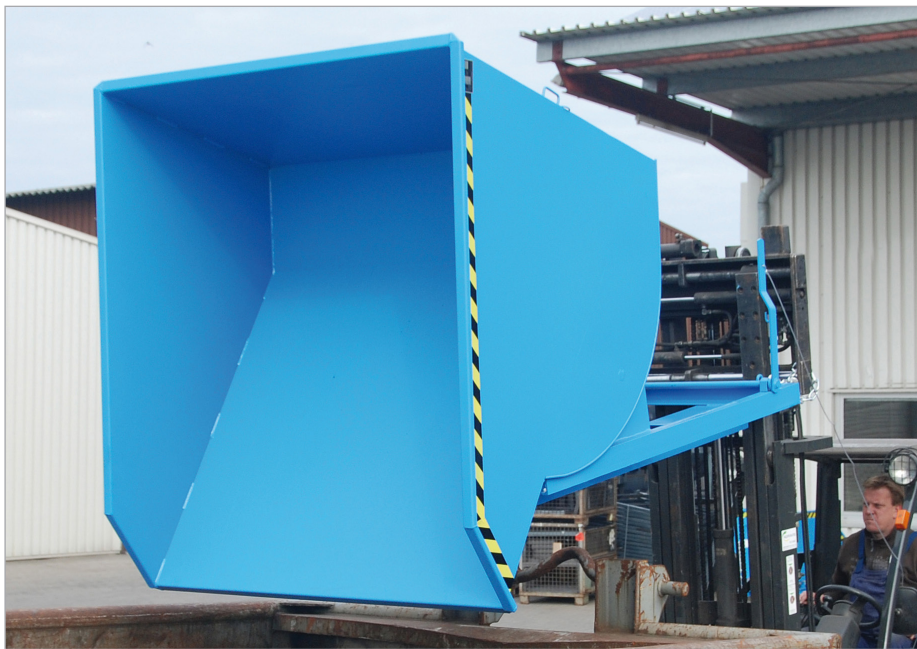

A well proven tilting container with rolling mechanism

- optimised load centre
- can be emptied at any height by cable operated from the driver's seat
- body with all-round reinforced edging
- sturdy frame with fork sleeves
- can be secured to prevent slipping and unintentional emptying
- wheels can be fitted later

Accessories

- 2 swivel + 2 fixed polyamide castors
Ø 180 mm, one swivel castor with brake
– construction height 225 mm
- galvanized lid, can be opened from both sides
- welding, oil- and watertight
- pick-up for a crane
- pick-up for a trolley jack
- trailer coupling and towing bar

Individual construction on request e.g.

- stainless steel
- other sizes



BKM with castors



BKM with lid



BKM with castors, trailer coupling and towing bar

	Volume (approx.) in m ³	Dimensions in mm (l x w x h)	Load capacity in kg	Weight in kg (painted/galv.)
BKM 30	0,30	1160 x 820 x 825	1500	115 / 125
BKM 50	0,50	1550 x 820 x 1045	2500	168 / 181
BKM 75	0,75	1760 x 820 x 1270	3000	224 / 241
BKM 100	1,00	1760 x 1060 x 1270	3000	248 / 267
BKM 150	1,50	1760 x 1560 x 1270	3000	365 / 393
BKM 200	2,00	1810 x 1560 x 1480	3000	387 / 417

Fork sleeve (hoops) inside dimensions in mm			
	A	B	C
BKM 30-75	225	200	80
BKM 100	410	200	80
BKM 150-200	600	200	80

Finish:	RAL 2000	RAL 3000	RAL 5012	RAL 6011	RAL 7005	hot-dip galvanized
----------------	-----------------	-----------------	-----------------	-----------------	-----------------	---------------------------