

TIPPING SKIPS TYPE KS / SKS



KS

Highly versatile - used to transport and empty bulk materials

- castors and handle facilitate manual handling
- fork sleeves - can be driven by a forklift
- is emptied at ground level or over a large volume skip when driven by a forklift
- sturdy steel construction
- sturdy frame with fork sleeves
- tiltable skip
- can be secured to prevent slipping and unintentional emptying
- 2 swivel + 2 fixed polyamide castors Ø 180 mm, one swivel castor with brake
- construction height 225 mm

Types available

Tipping Skip **KS**


- as above

Swarf Tipping Skip **SKS**

- welded oil and watertight
- with perforated sieve and 1" drain- cock designed to separate liquids from solids and drain them



SKS

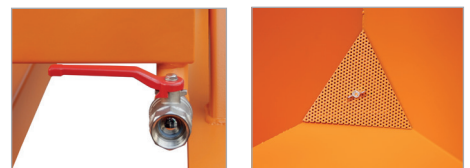

1" drain-cock

Perforated corner sieve



SKS

	Volume approx. in l	Dimensions (l x w x h) in mm	Height dumping edge in mm	Load capacity in kg	Weight painted in kg
KS 400	400	1220 x 1050 x 1115	1020	1000	110
KS 550	550	1250 x 1200 x 1170	1052	1000	120
KS 700	710	1345 x 1200 x 1270	1174	1000	132
SKS 400	400	1220 x 1050 x 1115	1020	1000	109
SKS 550	550	1250 x 1200 x 1170	1052	1000	122
SKS 700	710	1345 x 1200 x 1275	1174	1000	134

Fork sleeve inside dimensions in mm			
	A	B	C
KS / SKS 400	100	200	80
KS / SKS 550	180	200	80
KS / SKS 700	180	200	80

Finish:

RAL 2000

RAL 3000

RAL 5012

RAL 6011

RAL 7005