
LONG LOAD HANDLER TYPE LSL



Load from 2 sides; makes light work of handling long loads - easy to load and unload

- sturdy steel construction
- pick-up from 2 sides
- forks easily inserted
- can be secured to prevent slipping from forks
- 2 lashing straps to secure the load

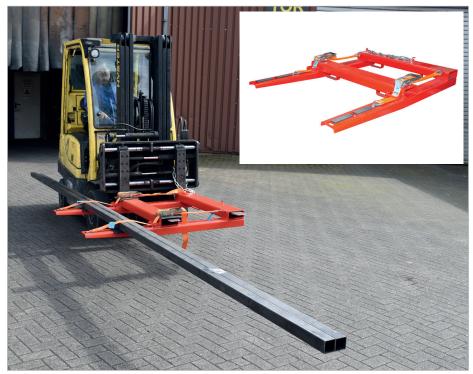

Securely held ...

Pick-up position for transport, for example through gates or passages



Picking up long material



You can't pass through a gate with long material unless you have an LSL!

RAL 2000

RAL 3000



....by lashing straps



Position: load at the front for loading and unloading

.

hot-dip galvanized

RAL 7005



Use the LSL for long material and easily pass through gates or navigate narrow aisles

RAL 6011

| | | | | Fork sleeve inside dimensions in mm | | | |
|-----|-------------------|---------------|----------------|-------------------------------------|-----|-----|------------|
| | | | | c | | | |
| | Dimensions | Load capacity | Weight in kg | | ļ | 1 | — <u> </u> |
| | (l x w x h) in mm | in kg | paint. / galv. | | А | В | C |
| LSL | 1465 x 1100 x 145 | 750 | 104 /112 | LSL | 495 | 150 | 60 |
| | | | | | | | |

RAL 5012

Finish: