

SWARF STACKING TIPPER TYPE BSS-N



BSS-N


	Volume (approx.) in m ³	Dimensions in mm (l x w x h)*	Load capacity in kg	Weight in kg (painted/galv.)
BSS-N 55	0,55	1000 x 800 x 900	1000	78 / 84
BSS-N 70	0,70	1200 x 800 x 900	1000	87 / 94
BSS-N 90	0,90	1200 x 1000 x 900	1000	99 / 106

*width not including pick-up cones

TIPPING CART TYPE KJ / TYPE MUK



KJ 150/L

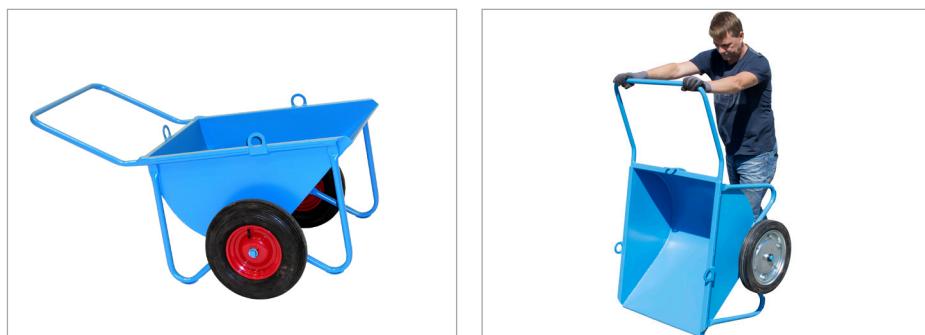

MUK 140/L

	Volume (approx.) in l	Dimensions in mm (l x w x h)	Load capacity in kg	Weight painted in kg
KJ 150/V .../L	150	1455 x 840 x 805	300	52
KJ 250/V .../L	250	1455 x 840 x 865	300	63
MUK 140/V.../L	140	1280 x 900 x 790	300	49
MUK 250/V.../L	250	1595 x 900 x 860	300	58

A transport cart with a tipping pan that can be used anywhere and everywhere

- sturdy construction
- welding, oil and watertight
- double-folded top rim with reinforced corners
- with 3 crane eyes
- steel tubing frame with supporting feet
- hub with wheel-bearing
- choice of tyres Ø 400 mm solid rubber (type .../V) or pneumatic tyre (type .../L)

Types available

Tipping Cart KJ

- tipping pan empties forwards
- automatic pan locking mechanism

Rocking Tipper MUK

- the tipping pan "rocks" forward over the runners

Finish:

RAL 2000

RAL 3000

RAL 5012

RAL 6011

RAL 7005

hot-dip galvanized